

UL Series Infrared Laser Diode Module

Part No: *UL5-3.5G-850*




Product Features

- High Stability and low noise
- Collimated or Adjustable focus beam
- Reverse Polarity Protection
- Custom Options Available

Application

- Measurement
- Bioanalytical
- Automation
- Alignment

Mechanical Drawing

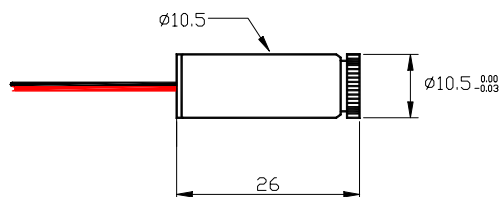

Operational Hazard-Semiconductor Laser Diode Module:

This laser module emits radiation that is invisible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage.

Limited Warranty: One year. No warranty coverage for disassembly, modifications or damage due to abuse or misapplication.

Specification

OPTICAL	
Wavelength	850 nm
Optical Output Power	3.5 mW
Stability	<1%
Wavelength Drift	0.2nm/°C
Noise (20MHz Bandwidth)	<0.5% RMS
Laser Class	Class IIIB
Laser Operation	Continuous
Laser Structure	Single Mode Laser
Divergence at the collimation	<0.5 milliradian
Spot Size	Adjustable Or Collimated(5mm)
Minimum Spot Size	<60µm at <10" distance
Pointing Stability	<50µrad
ELECTRICAL	
Operating Voltage	3 to 5 VDC
Operating Current	<60 mA
Control Circuit	Auto Power Control
Electrical Connections	+Red, -Black
MECHANICAL	
Dimension	10.5mm(D)x 26mm (L)
Cable	380mm
Operating Temperature	-10°C to +50°C
Storage Temperature	-40°C to +80°C
Heat Sink Requirements ¹	Not Required

Notes

1. Heat Sink: The UL Series Infrared Laser Diode Module is designed to operate without heat sink. Do not restrict air circulation around the device; an additional heat sink can be used to maximize the performance and life time of the laser.

Caution: The case is internally connected to the circuit; damaging to the anodized surface may result in failure of the laser module.



This module is for OEM use ONLY. OEM is responsible for compliance with all applicable safety regulations.

World Star Tech.

321 Lesmill Rd. Toronto, Ont. M3B 2V1 Canada
Tel: (416) 363-3332 Fax: (416) 363-3112 www.worldstartech.com



ISO9001:2000 Registered

